


PX

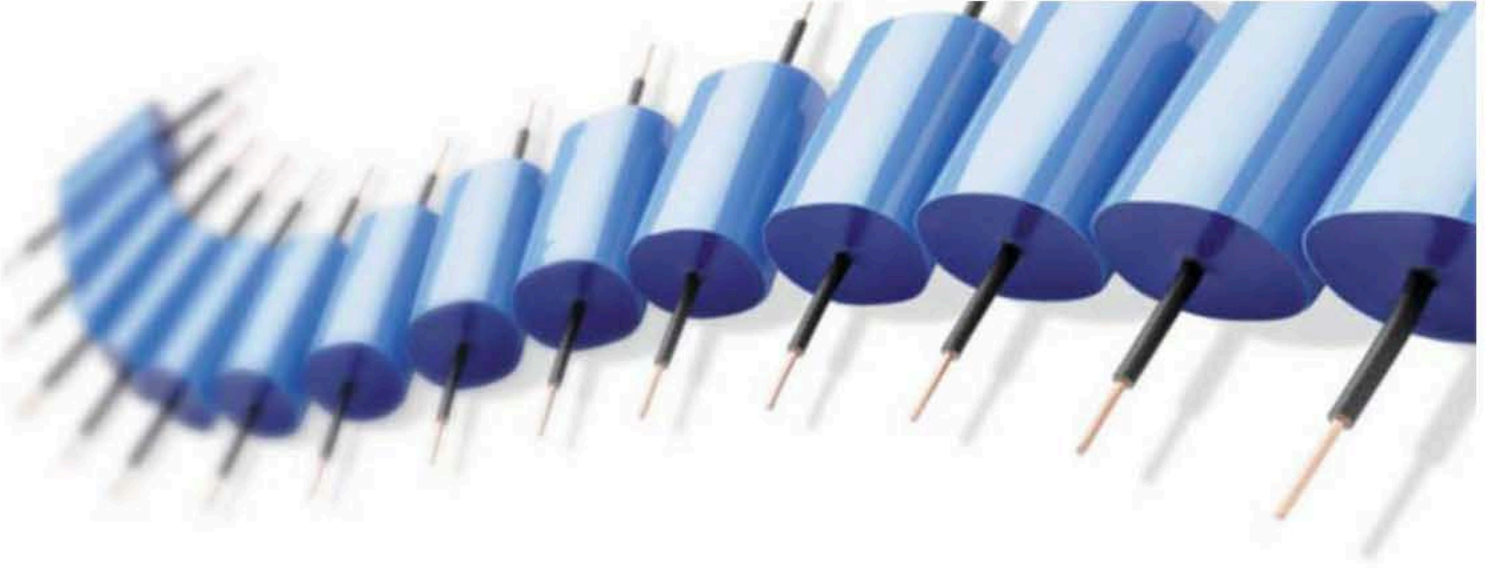

The PX range is fast growing into a favourite worldwide budget capacitor. It is currently specified by some of the best known brands throughout Europe, North America, and Asia. Its unsurpassed performance to price ratio make it a very attractive proposition.

Constructed from a 250Vdc (6 μ M) rated film the component is spindle wound. It is then given a special heat treatment before the insulated copper terminals are hand soldered to achieve the best possible connection.

The inherently low dissipation and dielectric absorption factors of polypropylene allied with an excellent mechanical stability results in an extremely detailed sonic performance. The construction also results in a low self inductance and ESR (Equivalent Series Resistance) and the devices are highly stable with regard to temperature and frequency.

As with all ClarityCap products tape and resin colours are flexible. Unless otherwise specified PX capacitors are supplied with blue tape and blue resin.

[OEM'S: CONTACT US FOR SAMPLES & PRICING >](#)

[PERSONAL: VIEW WORLDWIDE DISTRIBUTORS >](#)

SIZE CHART

Cap (μ F)	L	W	T
.150	21	10	5
.220	21	11	6
.330	21	12.5	8
.470	21	15	10
.680	21	17	12.5
1.00	28	16	11.5
1.50	28	19	14
2.20	28	22	17.5
3.30	28	26.5	22
4.70	34	27	22.5
6.80	34	32	27
10.00	45	31	26
15.00	45	37	32
22.00	45	44	39
33.00	60	46	41
47.00	60	54	49

Dimensions are shown in mm (max). Intermediate values are available upon request.

COMPONENT OUTLINE

