



FURUTECH
PURE TRANSMISSION

AEx
オーディオ銘機賞
Audio Excellence Award 2008



High Performance RCA Terminal Sockets *FP - 900 (G)*



FTECH-RCA-71067


Dimensions: Housing---14mmφ X22.9mm, Mounting Insulation set--- Nylon(Red, White)15mmφ X2.7mm, 28.7mm overall length.

FP-900 (G) Red and White Non-magnetic direct 24k Gold Plated Conductor (2 Pcs/ Set)

Features:

- Central and Earth conductor- α (Alpha) Eutectic Copper Alloy Conductor
- Non-magnetic direct 24k Gold Plated Conductor
- Copper Alloy Housing and Nut cap (24k gold plated)
- Nylon (red, white) Mounting Insulation set and PETF Teflon (white) Inner insulation.
- Mounting Insulation set to accommodate panels of any thickness
- Connections: Soldered

**Panel Cut-out Size
for RCA socket FP-900 series**

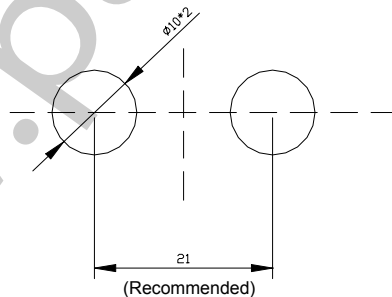

Drilling scheme
(Original size)

All metallic parts are treated with the

'FURUTECH α (Alpha) Process (Super Cryogenic & Demagnetize Treatment.)

Make a More Powerful Connection with Furutech!

