



FURUTECH
PURE TRANSMISSION

AEx
オーディオ銘機賞
Audio Excellence Award 2008



Evolution Audio series

High End Audio Interconnect



FTECH-71166

FTECH-71167

Furutech's Evolution Series was awarded The Absolute Sound Editors' Choice Award in both 2007 and 2008



Evolution Audio (RCA) • 1.2meter / Evolution Audio (XLR) • 1.2meter

Features:

- High performance beautifully engineered gold-plated RCA [FP-110 (G)] or XLR [FP-701M/FP-702F (G)] XLR connectors
- RCA center filament pin a high-contact work of engineering art composed of 24k gold-plated nonmagnetic α (Alpha)-OCC conductor with Teflon dielectric
- RCA connector backbone composed of nonmagnetic 24k gold-plated eutectic cast brass with beautifully finished nonmagnetic copper alloy outer locking shell
- XLR connector pins beautifully engineered α (Alpha)-OCC conductor with PBT dielectric
- XLR body and housing made of nonmagnetic copper alloy
- Shield 1 0.12 mm α (Alpha) conductor wire braid
- Insulated with polypropylene reducing capacitance and damping vibration
- Results in greater resolution, clarity, powerful dynamics, and an ultra-quiet soundstage in which music develops more fully without artificial upper-frequency "presence region" glare

α (Alpha) Conductor Is Composed Of Fine OCC Wire Strands

Treated With Furutech's α (Alpha) Cryogenic and Demagnetizing Process

Here's What The Critics Say

"My first overall impression [of the Evolution cables] was one of control. ...It was as though I

could feel that there was something holding the music firmly within its grasp and allowing the system to reproduce more effectively the intensity, fabric and overall visceral impact that one might expect in a live environment.

“The sound I heard was simply put spectacular. The system’s ability to take the intensity of the music and blend it with the subtle nuances of particularly difficult passages allowed for a listening experience that I am somewhat unaccustomed to hearing from my system in general.

“... Extremely lifelike and palpable without being overly dominate or forward sounding. ... The noise floor was lowered and I was able to hear a rich harmony of musical instruments that did not overwhelm the passage with excess noise or distortion.

“ ... wholeheartedly recommend these cables to someone looking for more from their present system.”

-- Brett Rudolph, [Enjoy the Music.com](http://www.enjoythemusic.com)[®]

Specifications: Construction and Materials

- 80-strand α (Alpha) -OCC Conductor • 0.18mm, 1.86mm diameter
- Insulation: Polypropylene (Red/White) 2.46mm diameter
- Cable Lay: Two cores twisted together with cotton yarn
- Cable Wrap: Non-woven fabric wrap approx. 5.0mm
- Shield: 0.12mm braided α (Alpha) Conductor approx. 6mm diameter
- Sheath: RoHS Compliant Flexible PVC (Dark Green) 9.0mm diameter
- Jacket: Nylon yarn braid approx. 10mm
- XLR Connectors: FP-701 M(G) and FP-702 F(G) XLR
- RCA Connectors: FP-110(G) RCA


Electrical Properties of Cable

Electrical Properties of Cable		Test Method
Max. Conductor Resistance	8.975 Ω /km	JISC3005 4.4 20 \times
Min. Insulation Resistance	1x10 ¹⁰ M Ω \times km \uparrow	JISC3005 4.7.1 20 \times
Dielectric Strength	AC. 1000 V / 1 min.	JISC3005 4.6 a
Capacitance	104.37 PF / m	at 1 KHz
Impedance	66.79 Ω	at 200 KHz

All metallic parts are treated with the

**FURUTECH α (Alpha) Process (Super Cryogenic & Demagnetizing Treatment.)*

Construction Details

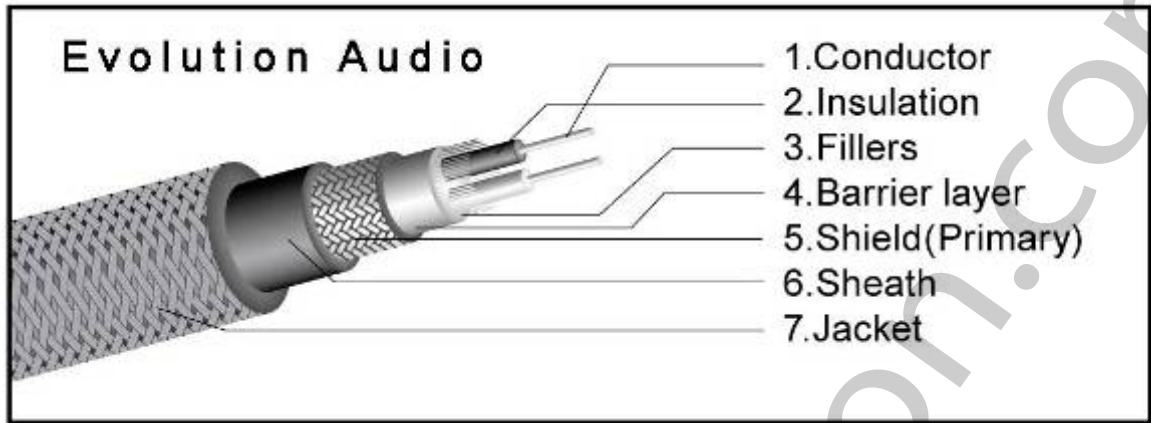

FURUTECH CO., LTD.

Make a More Powerful Connection with Furutech

www.partsconnexion.com