

FURUTECH

PURE TRANSMISSION



New PRODUCT 2011!

F 250 Series Disconnect Terminals

Insulated Push-on Disconnects

F 210 / F 214 / F 218



F 250 Package Images

Features:


- The Furutech F250 Insulated Push-on Disconnect Terminal features α (Alpha) phosphor bronze non-magnetic 24k Gold-plated conductor.
- TAB Size: 0.250 X 0.032 " / 6.35 X 0.8 mm.
- Wire Size: F 210 --- 5.5 sq. mm max. (12~10 AWG)
F 214 --- 2.0 sq. mm max. (16~14 AWG)
F 218 --- 1.25 sq. mm max. (22~18 AWG)
- Insulation Tube: RoHS Compliant PVC (Yellow / Blue / Red).
- Rhodium plated version by request.
- Package: each 10 pcs (total 30 pcs) / set.

A (Alpha) conductor is the fine μ -OFC conductor wire strands treated with the α (Alpha) process.

FURUTECH

PURE TRANSMISSION


Dimensions :

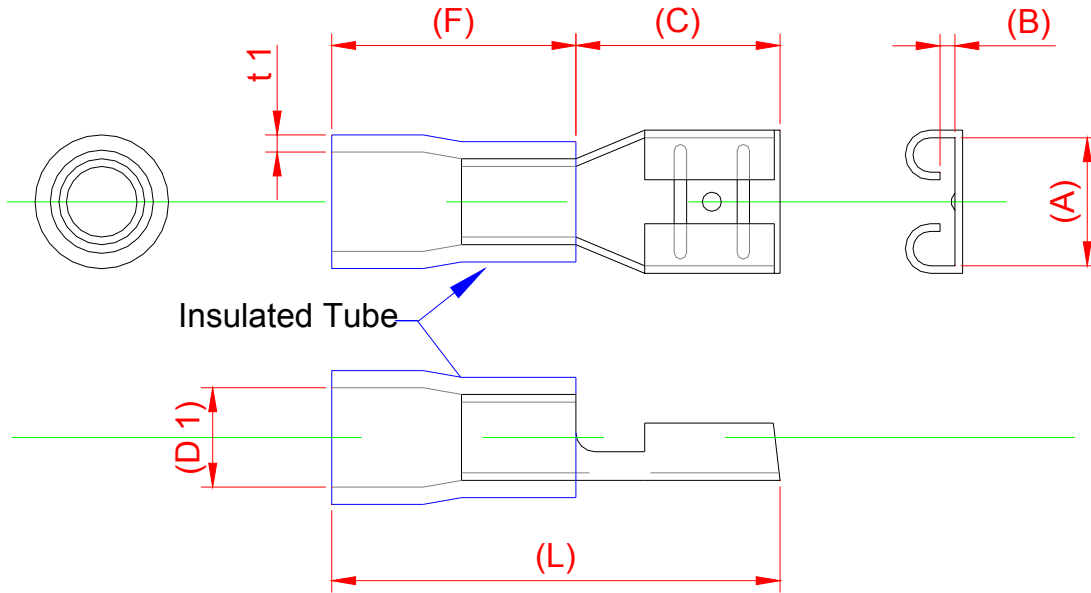

Unit: mm

Location	(A)	(B)	(C)	(F)	(L)	(D 1)	(t 1)	Tube Color
Item No.								
F 210	6.5	0.78	10.5	12.0	22.5	5.5	0.8	Yellow
F 214	+0.15	±0.05		9.5	20.5	4.5		Blue
F 218	-0.1			9.5	20.5	4.0		Red

Package Explanation:

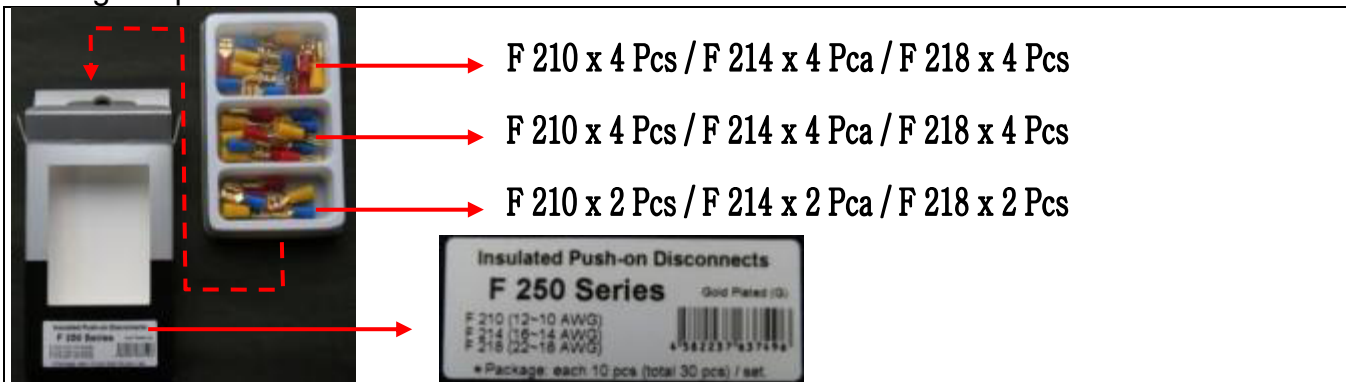

All metallic parts are treated with the

*FURUTECH α (Alpha) Process (Super Cryogenic & Demagnetizing Treatment.)