

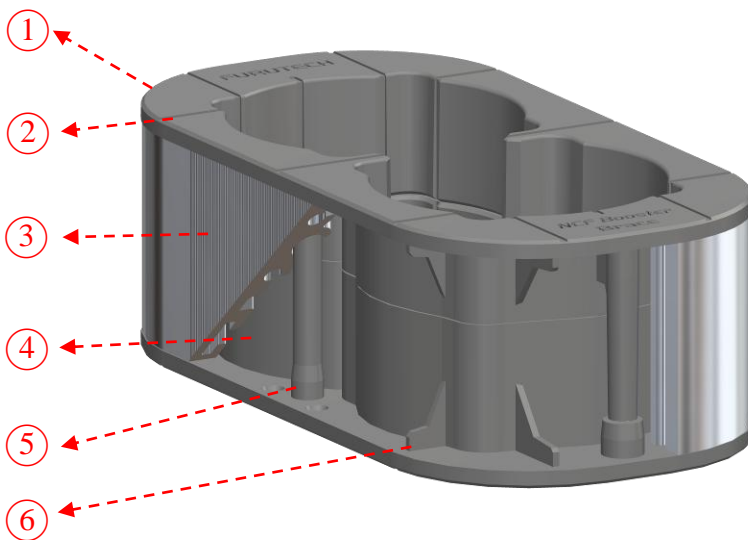


**High End Performance  
Connector Support  
NCF Booster-Brace**




*Multi-material Hybrid Construction – Furutech Original  
Design*

**---For the Ultimate Connector Damping Solution**

**Features and Materials:**



1. **NCF (multi-material hybrid structure):** NCF formulated nylon resin (Body).
2. **Anti-vibration grooves:** suppresses surface vibration.
3. **Housing:** Special blasted and anodized aluminum alloy. Internal structure designed to damp resonance and improve sound.
4. **Air chamber:** Internal air pressure suppresses vibration.
5. **Vibration radiating NCF pillar.**
6. **Vibration suppression wall (NCF damping wall):** elimination of resonance.


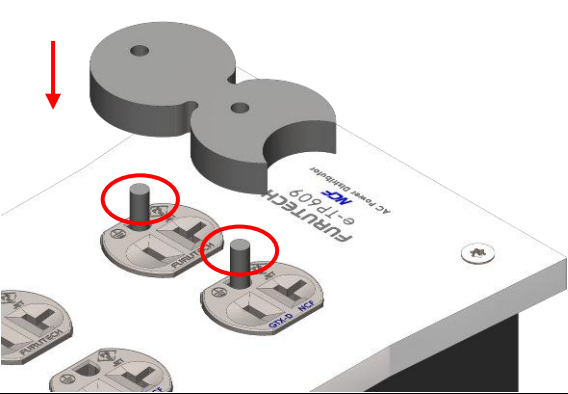
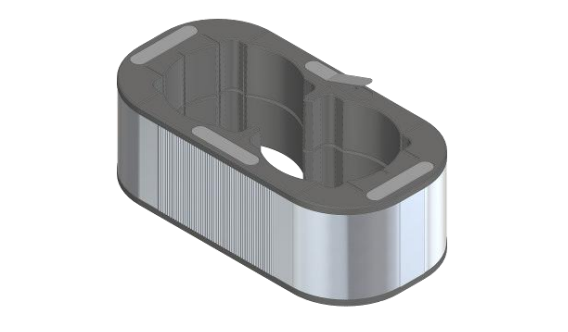
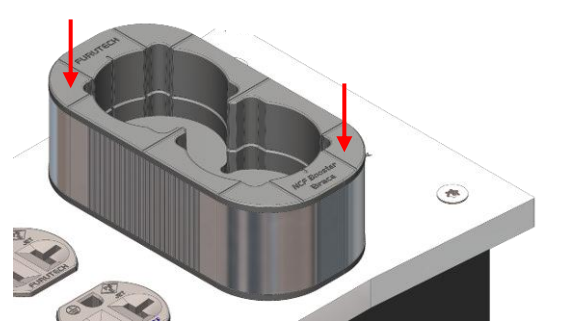
Accessories	
	Special adhesive double-sided tape (4 spare pieces included)
Brace body adhesive position fixing auxiliary parts	
Parts (1) 	Parts for setting EVA block position (2 Pcs)
Parts (2) 	EVA block for setting Brace (body) position (Included in package)

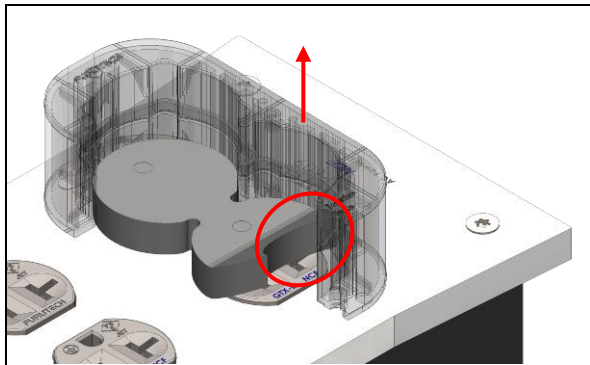
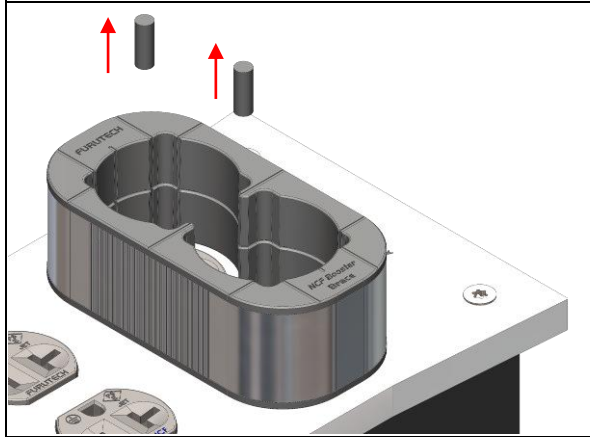
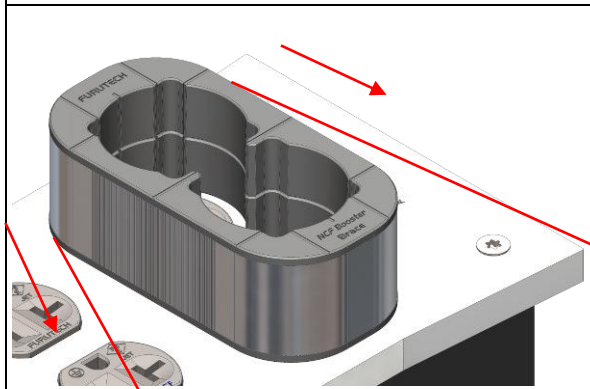
Overall Dimensions: W 54 X L 106 X H 35mm approx.

Net Weight: 100g approx.

Attached with special adhesive double-sided tape: strong adhesion with no residual glue.

**⚠ When installing the NCF Booster-Brace, be sure to unplug the power cord of the power strip from the wall outlet. If installing the NCF Booster-Brace while the power strip is connected to a wall outlet, turn off the main power breaker.**

Directions for fixing the position of NCF Booster-Brace	
	Take out the position setting auxiliary parts (1) and insert the two parts (1) into the ground holes of the outlet
	Take out the EVA Block position setting part (2) and place over parts (1).  (Make sure parts (1) and (2) are set flush on the surface; shown at the red line)
	Carefully remove the double-sided adhesive tape adhesive sheet on the bottom.
	Set the NCF Booster-Brace over part (2) and apply pressure (as shown by the red line) to stabilize the body.

	<p>Insert your index finger into the NCF Booster-Brace and lift part (2) (from the red circle end), and use your index finger and thumb to remove part (2) completely (as shown by the red line).</p>
	<p>Remove parts (1) inserted in the ground holes of the outlet section.</p> <p>Positioning of NCF Booster-Brace (body) is completed.</p>
<p><b>Removal method (suggested)</b></p>	
	<p>To remove, use dental floss (moving side to side, as shown by the red line) and separate the NCF Booster-Brace from the surface. Clean off any residual glue.</p>

**\*To replace double-sided tape**

If you need to replace the double-sided tape, please carefully remove the double-sided tape and residual glue. Apply new double-sided.

(When applying new double-sided tape, apply pressure to make sure that it is flat and stable, otherwise, the double-sided tape may come away when peeling off the adhesive tape protective cover)