


HBH, HBV, HBW

1/4" x 1 1/4" and 5 mm x 20 mm fuse holders

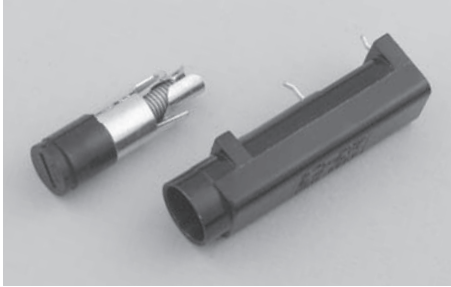

Product features

- For 1/4" x 1 1/4" and 5 x 20 mm fuses
- Fuse carriers are interchangeable
- Vertical and horizontal body mounting versions
- Fuse carrier and knob are spring loaded bayonet type with screwdriver slot
- "Kicked" terminals (all models) for optimum wave-soldering
- Stabilizer pins on HBV model
- High dielectric molded thermoplastic meets UL 94V0

Agency information

- CE, VDE 4009241 (HBV, HBW) SEMKO 800444
- UL Recognized: IZLT2, E14853
- CSA Certified: Class 6225-01, File 47235

Resistance ratings

- Insulation resistance: 10,000 megaohm at 500 Vdc
- Contact resistance: Less than 0.005 ohms at 200 mV

Dielectric strength

- Dielectric strength: Over 200 V/mil


General specifications

- Operating Temperature: (-40 °C to + 85 °C)
- Temperature rating (RTI): The mounting body for all devices has a temperature rating of 150 °C. The knob for all devices has a temperature rating of +130 °C.

Ordering

- Specify packaging, product, and option code

Part number	Specifications						
	Fuse holder		Voltage rating	Current Rating (A), Agency approval			
	Body Mount	Carrier Size		Volts	UL	CSA	VDE
HBH-I	Horizontal	1/4" x 1 1/4"	250	16	12	-	10
HBH-M	Horizontal	5 x 20 mm	250	16	12	-	10
HBV-I	Vertical w/ stability pins	1/4" x 1 1/4"	250	16	12	6.3	10
HBV-M	Vertical w/ stability pins	5 x 20 mm	250	16	12	6.3	10
HBW-I	Vertical w/o stability pins	1/4" x 1 1/4"	250	16	12	6.3	10
HBW-M	Vertical w/o stability pins	5 x 20 mm	250	16	12	6.3	10
HBH	Horizontal	na	250	16	12	-	10

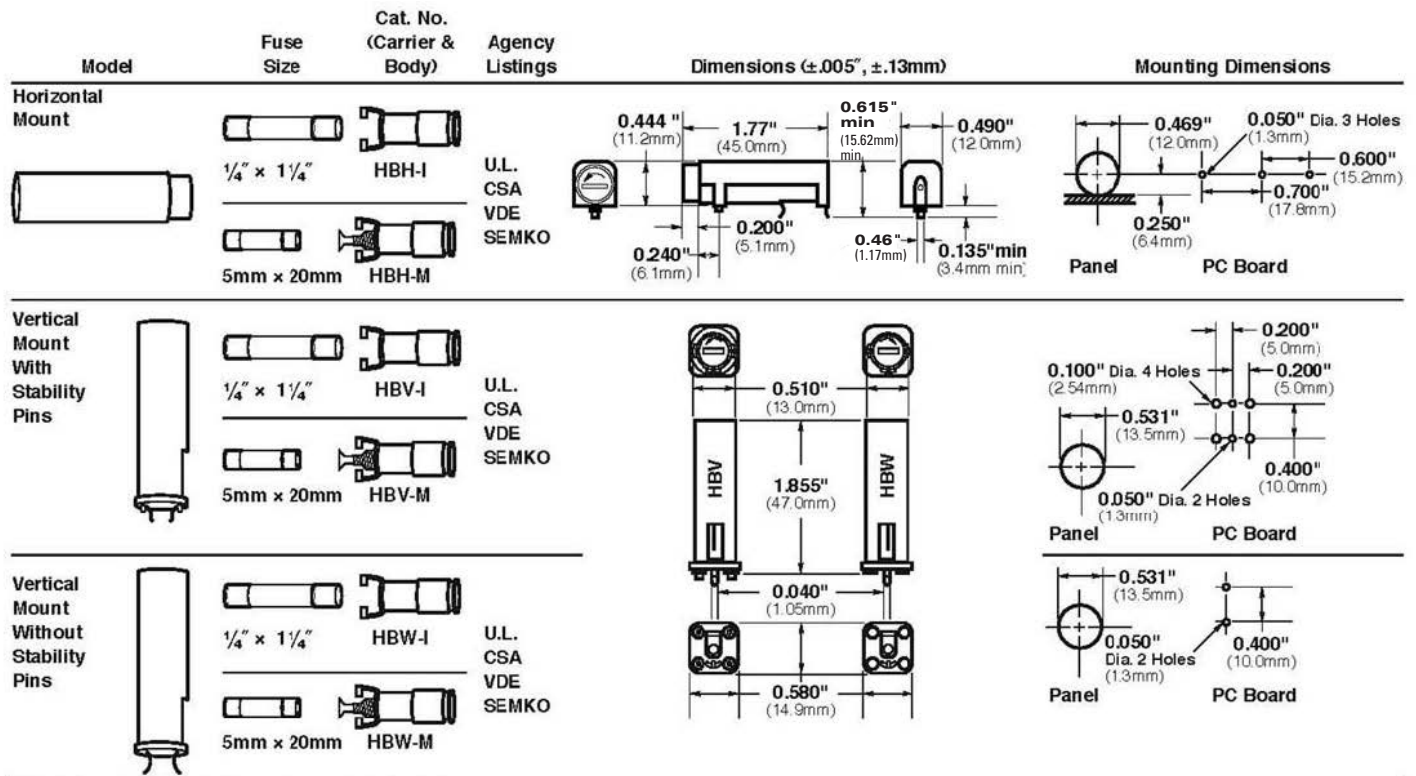

NOTE: Carriers do not fit panel-mounted fuseholders.

Packaging Code	
Packaging Code Prefix	Description
Blank	10 fuse holders packed into a carton
BK	100 fuse holders packed into a cardboard shelf package

Option Code	
Option Code Suffix	Description
-R	RoHS compliant version