

Audio Cable MConnect

Inner Excellence


The reproduction of music by PTFE-insulated SolidCore Copper wires **CUW** excels by natural vibrancy and fineness as well as highest tonal neutrality, and an excellent price/performance ratio.

Initial listening test with regular stranded wires quickly showed that our coil wires, used as internal cabling for loudspeakers impress by their detailed and acoustically balanced music performance.

An additional PTFE sheath prevents the oxygen-free copper conductor (99.997% purity) from abrasion and tonal influences by unwanted microphonics.

The following, individually isolated and twisted versions are particularly appropriate:

- 2 * 1.0mm for tweeters
- 2 * 1,5mm for mid-drivers and mid-woofers
- 6 * 1,5mm for complete audio signals
- 2 * 2,0mm for woofers and sub-woofers

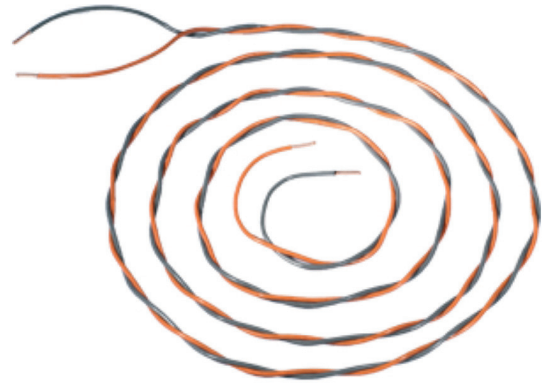

* Insulation test voltage 2 500V DC,
Max. operating voltage 250V AC
Strength of PTFE insulation: min. 0.25 mm

CUW210GY/OG

Copper wire 2 * 0,8 mm², PTFE-insulated, grey/orange *

price á meter

CUW215GY/OG

Copper wire 2 * 1,8 mm², PTFE-insulated, grey/orange *

price á meter

CUW615GY/OG

Copper wire 6 * 1,8 mm², PTFE-insulated, grey/orange *

price á meter

CUW220GY/OG

Copper wire 2 * 3,1 mm², PTFE-insulated, grey/orange *

price á meter